


# FORGED BRASS BELLOWS LINE VALVES

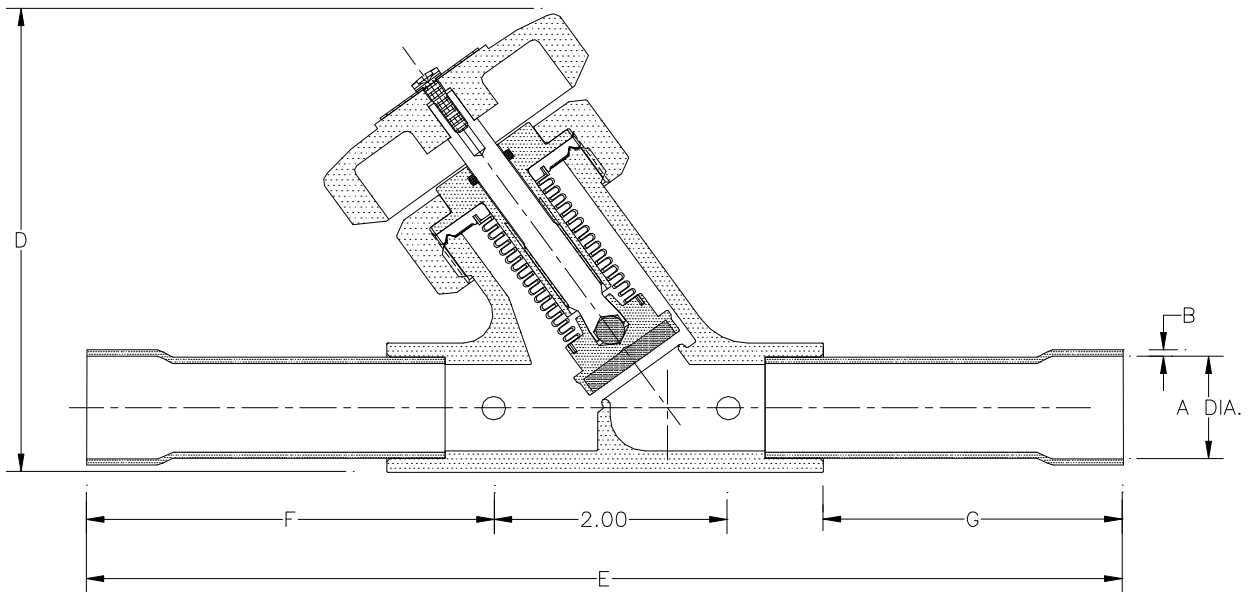

## FORGED BRASS BELLOWS VALVES WITH EXPANDED COPPER TUBE EXTENSIONS

PART NUMBER	A ODS	B	C	D	E	F	G	BODY WIDTH	APPROX. WEIGHT	Cv
B0625	.628	.040	.400	3.600	9.600	3.800	3.050	1.19	1.80	3.60(E)
B0875	.879	.045	.562	4.170	11.570	4.780	3.910	1.50	2.50	6.70(E)
B1125	1.130	.050	.687	5.170	15.700	6.850	5.350	1.92	4.25	11.00(E)

NOTE: (E) = ESTIMATED VALUES

## FORGED BRASS BELLOWS VALVES WITH 316L STAINLESS TUBE EXTENSIONS

PART NUMBER	A ODS	B	C	D	E	F	G	BODY WIDTH	APPROX. WEIGHT	Cv
B0500-049	.500	.049	.406	3.610	9.500	3.750	3.000	1.200	2.30	3.50(E)
B0500-065	.500	.065	.406	3.610	9.500	3.750	3.000	1.200	2.35	3.50(E)
B0750-065	.750	.065	.562	4.170	9.750	3.875	3.000	1.500	3.00	6.50(E)
B0750-095	.750	.095	.562	4.170	9.750	3.875	3.000	1.500	3.05	6.50(E)
B1000-065	1.000	.065	.687	5.170	11.000	4.500	3.000	2.000	4.75	11.00(E)
B1000-095	1.000	.095	.687	5.170	11.000	4.500	3.000	2.000	4.80	11.00(E)

\* DOES NOT INCLUDE PURGE ACCESS PORT DIMENSION.

NOTE: THE VALVE INTERNALS ARE NOT TO BE REMOVED PRIOR TO INERT GAS PURGE INSTALLATION.

VALVE WORKING PRESSURE IS 250 PSI MAXIMUM

ALL PRODUCTS ARE TESTED TO  $1 \times 10^{-7}$ . LOWER RATINGS ARE AVAILABLE AT ADDITIONAL COST.

**DANCAR CORPORATION - 145 North Benson Road, Middlebury, CT 06762**

Tel. (203) 598 0205 - Fax (203) 598 0211

dancar@dancar.com