


FORGED BRASS CHECK VALVES

1-1/4" TO 4"

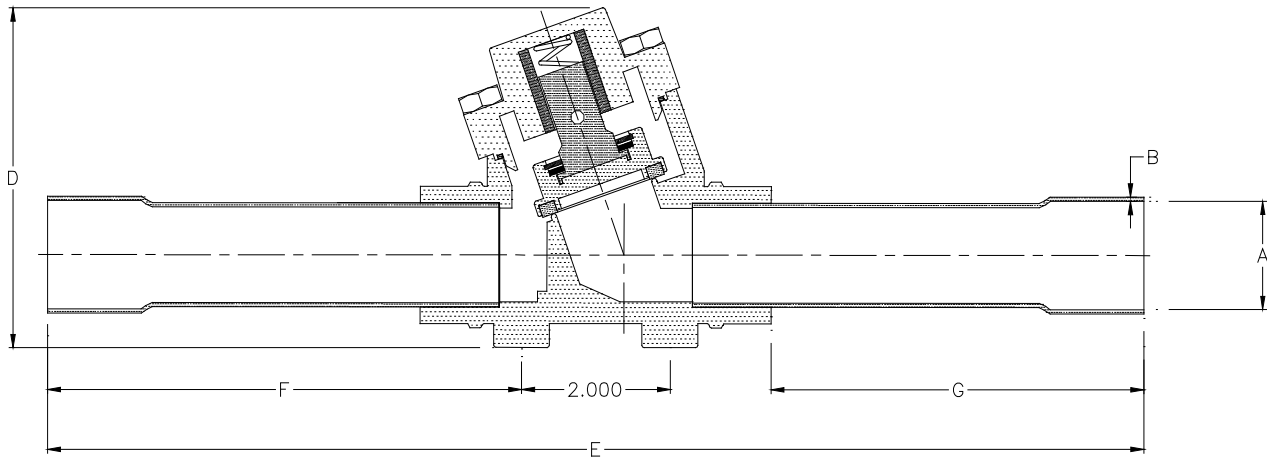

FORGED BRASS CHECK VALVES WITH EXPANDED COPPER TUBE EXTENSIONS

PART NUMBER	A ODS	B	C	D	E	F	G	BODY WIDTH *	APPROX. WEIGHT	Cv
C1375	1.375	.055	1.312	4.562	18.500	8.250	6.875	2.625	5.00	21.67
C1625	1.625	.060	1.312	4.562	18.500	8.250	6.875	2.625	5.00	23.63
C2125	2.125	.070	1.687	5.875	19.375	8.688	6.500	3.500	12.80	42.00
C3125	3.125	.090	2.125	7.750	21.000	8.875	6.125	4.500	35.00	91.30
C4125	4.125	.110	2.250	8.125	23.875	10.313	6.500	4.500	37.00	91.30

NOTE: (E) = ESTIMATED VALUES

FORGED BRASS CHECK VALVES WITH 316L STAINLESS TUBE EXTENSIONS - NOT EXPANDED

PART NUMBER	A ODS	B	C	D	E	F	G	BODY WIDTH *	APPROX. WEIGHT	Cv
C1500	1.500	.065	1.312	4.562	18.500	8.250	6.875	2.625	5.00	23.63
C2000	2.000	.065	1.687	5.875	19.375	8.688	6.500	3.500	12.80	42.00
C3000	3.000	.065	2.125	7.750	21.000	8.875	6.125	4.500	35.00	91.30
C4000	4.000	.120	2.250	8.125	23.875	10.313	6.500	4.500	37.00	91.30

* DOES NOT INCLUDE PURGE ACCESS VALVE. ADD 2-1/2" to STANDARD WIDTH.

NOTE: THE VALVE INTERNALS ARE NOT TO BE REMOVED PRIOR TO INERT GAS PURGE INSTALLATION. IT IS CUSTOMARY TO PURGE CHECK VALVES THRU THE UPSTREAM PURGE CONNECTION DURING INSTALLATION.

VALVE WORKING PRESSURE IS 250 PSI MAXIMUM.

ALL PRODUCTS ARE TESTED TO 1×10^{-7} . LOWER RATINGS ARE AVAILABLE AT ADDITIONAL COST.

DANCAR CORPORATION - 145 North Benson Road, Middlebury, CT 06762

Tel. (203) 598 0205 - Fax (203) 598 0211

dancar@dancar.com